




FRONT PERSPECTIVE



SIDE PERSPECTIVE



SIDE ELEVATION

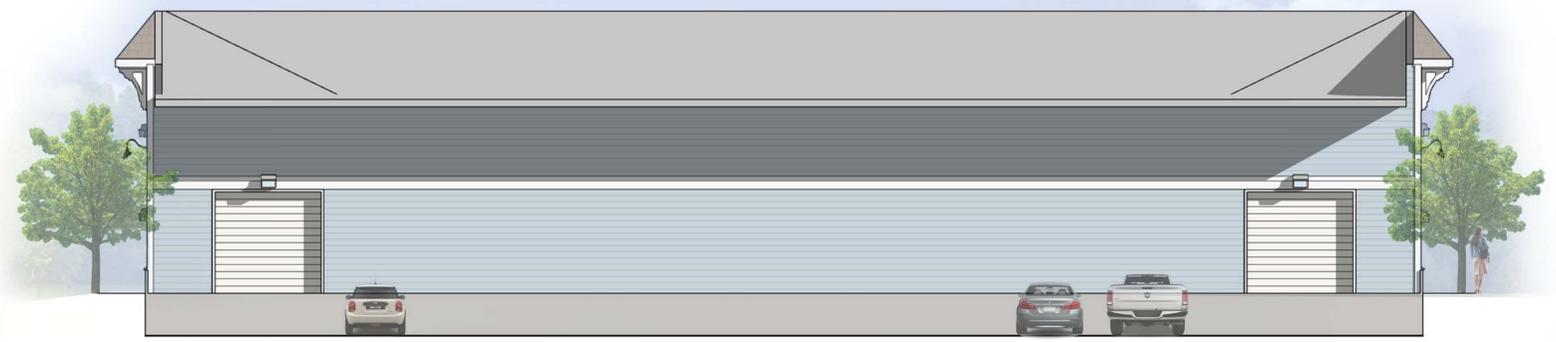

BACK ELEVATION



SIDE ELEVATION



FRONT ELEVATION

- CONSTRUCTION MATERIALS:
1. BASE MATERIAL: TO BE A TYPICAL 4" STONE VENEER w/ BASE CAP
 2. SIDING MATERIAL: CEMENTITIOUS CLAPBOARD SIDING TO BE HARDI PANEL OR SIMILAR
COLORS TO BE BOOTHBAY LIGHT BLUE w/ WHITE & DARK BLUE ACCENT
 3. TRIM MATERIAL: CEMENTITIOUS TRIM BOARD OR AZEK TRIM BOARD OR SIMILAR
 4. ROOFING MATERIAL: TYPICAL ASPHALT SHINGLES OR SIMILAR
 5. LIGHTING FIXTURES: (10) ANGLED GOOSENECK FIXTURES
(2) SECURITY WALL-PACK FIXTURES
(4) OVER-HEAD DOOR WALL PACK FIXTURES

GOOSENECK LIGHT FIXTURE:



HI-LITE MFG. CO., INC
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

Job Name: _____
Type: _____
Quantity: _____

B-1

HI-LITE MFG. CO., INC
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
web: www.hilitemfg.com
e-mail: sales@hilitemfg.com

Job Name: _____
Type: _____
Quantity: _____

**H-18110
Angle Shade Collection**

FINISH - Multi-stage pretreatment procedure using materials of polyester/polished powder coat, baking enamel liquid, raw metals, and galvanized finishes. Standard Finishes are: 91(Black), 93(White), 95(Dark Green), 96(Galvanized), B747(Powder Coat Rust), BKD1(Black Texture), GN20(Powder Coat Patina).
Upgraded Finishes are: 29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 138, 139, 140, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.
(Custom finishes available).

For interior finish of fixture refer to color chart on pages 344-348.

MOUNTING - Stem, Arm, and Flush mounting available.

ACCESSORIES - CGU(Cast Guard and Glass), WGU(Wire Guard and Glass), WGR(Wire Guard) and SK(Swivel Knuckle) available.

REFLECTOR - Heavy duty, spun shade, aluminum 6061-0 and/or 1100-0, galvanized 22 gauge, steel 20/22 gauge, copper 032/040 and brass 032/040 construction. Depend on finish.

SOCKETS/LAMPS - Available in:
Incandescent
- rated 200 watt max/120 volt, medium base.
Compact Fluorescent(CFL)
- rated 13/18/26/32/42/57 watt max/120/277 volt, GX24 base.
Metal Halide(MH)
- rated 35/50/70/100/150/175 watt max/120/208/240/277 volt, medium base, 4KV socket.
High Pressure Sodium(HPS)
- rated 50/70/100/150 watt max/120/277 volt, medium base.
Light-Emitted Diode (LED)
- rated 20w LED max. See LED specifications for complete part number.

UL LISTED

MADE IN THE U.S.A. Suitable for wet location.

SECURITY WALL-PACK LIGHT FIXTURE:

PROJECT NAME: _____ CATALOG NUMBER: _____
NOTES: _____ FIXTURE SCHEDULE: _____
Page: 1 of 2

TRADITIONAL SECURITY LIGHT WITH PHOTOCELL
SEC SERIES

PRODUCT DESCRIPTION:
MaxLite's ENERGY STAR®-qualified 12-watt MaxLED® Security Light Fixture with dusk-to-dawn PhotoCell provides optimal illumination for outdoor commercial and industrial environments. Available in an architectural bronze finish, the fixture saves up to 81% of the energy consumed by incumbent lamps, and is backed by MaxLite's five-year limited warranty.

FEATURES:

- Replaces up to 70-watt high-pressure sodium
- Maintenance free and constructed without any hazardous materials
- Mounts to recessed junction box or directly to a wall
- Conduit holes on back and bottom for mounting and wiring flexibility
- 5 Year limited warranty

CONTROLS:
120VAC Photocontrol: Photocontrol powers the fixture when light levels reach 20 lux or below, and turn it off at 30 lux or higher. The operating temperature of the photocells are -30°F - 120°F. Photocell mounted internally.

MODEL SELECTION (Full list of order codes on pg. 2) Typical order: example: SEC12U50BPC12

SEC	12U	50	B	PC12
FAMILY	NOMINAL WATTAGE, EQUIVALENCY	CCT	FINISH	PHOTOCONTROL
SEC= Security Light	12U= 12W, 70W High Pressure Sodium equivalent	50= 5000K	B= Bronze	PC12= 120V

Phone: 1-800-555-5629 | Fax: 973-244-7333 | Web: www.maxlite.com | E-mail: info@maxlite.com Revised: 05-31-16

TRADITIONAL SECURITY LIGHT WITH PHOTOCELL
SEC SERIES

Page: 2 of 2

SPECIFICATIONS:

ITEM	SPECIFICATION	SEC12U50BPC12
GENERAL PERFORMANCE	Lumens Delivered (lm)	1,300
	Efficacy (lm/W)	107
	CCT	5000K
	Lumen Maintenance (L70, TM-21 @ 25°C)	135,000 hours
	Color Rendering Index (CRI)	> 80
ELECTRICAL	Input Voltage (V)	120V, 60Hz
	Power Factor	> 0.99
	Input Power (W)	12
PHYSICAL	Mounting	Can be mounted to recessed outlet box or directly to walls
	Operating Temperature	-30°F-115°F
APPLICATION	Lens	Impact- and UV-resistant polycarbonate
	Housing	Aluminum and polycarbonate
	Certification	cETLus, LM-79, LM-80, TM-21, Energy Star
	Environment	Outdoor wet locations
	Humidity	20% - 85% RH, non condensing
	Warranty	5 Years

ORDERING*:

ORDER CODE	MODEL	OPTIONS	VOLTAGE (V)	NOMINAL POWER (WATTS)	CCT	FINISH
75689	SEC12U50BPC12	Photocontrol	120	12	5000K	Bronze

*Please contact your MaxLite representative to order products that don't have order codes listed here.

CONSTRUCTION:
FIXTURE: The heavy duty die-cast, powder-coat aluminum base, with a one-piece injection molded polycarbonate prismatic lens/housing masked and painted for a seamless cover. The fixture is gasketed and assembled with two screws to produce a sealed fixture that is free of water, dirt and insects.

LENS: Polycarbonate lens with UV stabilizers

LED MODULE: Aluminum components in the LED module act as a heat sink to reduce heat and ensure long life. The module uses directional settings to control the fall of light and the light levels. This fixture is an efficient replacement for metal halide and incandescent fixtures that reduces wattage and extends life.

LED DRIVER: Self contained driver meets UL 1310 UL 48 Class2

FINISH: The bronze base is powder-coat painted, and the housing is masked and painted bronze to match the base.

Phone: 1-800-555-5629 | Fax: 973-244-7333 | Web: www.maxlite.com | E-mail: info@maxlite.com Revised: 05-31-16

OVER-HEAD WALL-PACK LIGHT FIXTURE:

FEATURES & SPECIFICATIONS

INTENDED USE:
Ideal for mounting above entryways and loading docks.

CONSTRUCTION:
Rugged, corrosion-resistant die-cast aluminum back housing and hinged door frame. Castings are sealed with a one-piece gasket to inhibit the entrance of external contaminants. Finish is bronze polyester powder paint for lasting durability.

ELECTRICAL:
Ballast is constant voltage autotransformer. Ballast is 100% factory tested.
Metal halide: super CWA pulse start ballasts, 88% efficient and ESA compliant, are required for 250-400W (most order SCW option) for US shipments only. CSA required for pulse start shipments to Canada. 250W and 400W do not comply with California Title 20 regulations.
Socket: Mogul-base socket, nickel-plated screw shell and center contact.

OPTICS:
Reflector is prismatic borosilicate glass. Reflector is die-formed anodized dipped aluminum.
Mogul-base lamp included in carton.

INSTALLATION:
Housing is configured for mounting directly over a standard 4" outlet box or for surface wiring via any of three convenient 1/2" threaded conduit entry hubs.

LISTING:
UL Listed to US and Canadian safety standards (see Options). Suitable for wet locations (25°C maximum ambient temperature).

WARRANTY:
2 year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx
Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

TWR2 250W
METAL HALIDE: 250-400W

TWR2 400W

ORDERING INFORMATION Example: TWR2 400MTB SCWALPI

Catalog Number	Wattage	Voltage	Photocell Included	Lamp Included	Available in Canada
TWR2 250M 120/240 LP CSA	250	120/240	N	Y	Y
TWR2 250M TB SCWALPI	250	120/208/240/277	N	Y	N
TWR2 400MTB SCWALPI	400	120/208/240/277	N	Y	N

Accessories: Order as separate catalog number. Shipped separately.

TWR2WGU Wireguard

OUTDOOR TWR2-36-S

TWR2 Metal Halide Wall Pack

TWR2 250M Test No. LTL10414

COEFFICIENT OF UTILIZATION

250W Metal Halide lamp, 20000 rated lumens. Footcandle values based on 20' mounting height. Distribution.

LITHONIA LIGHTING
An Acuity Brands Company

Phone: 1-800-279-8041 Fax: 770-918-1200 www.lithonia.com © 2009-2016 Acuity Brands Lighting, Inc. All rights reserved. Rev. 03/28/2016

